

SIM922A, SIM923A

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

Small Instrumentation Modules

SIM922A and SIM923A — Diode and Pt RTD temperature monitors with analog outputs

- Single-channel LED display
- 1.4 K to 475 K with Si, GaAs or GaAlAs diodes
- 20 K to 873 K with platinum RTDs
- Two analog outputs:
Linearized V proportional to T
Sensor voltage (buffered)



SIM922A and SIM923A Temperature Monitors

The SIM922A Diode Monitor and the SIM923A RTD Monitor continuously read a single sensor and provide both digital and analog outputs. Based on the modular SIM platform, they provide high performance capability in a small footprint.

SIM922A

The SIM922A has a programmable, precision 10 μ A current source to provide sensor excitation. Results can be displayed in either kelvins or volts.

SIM923A

The SIM923A has selectable 10 μ A and 1 mA current sources to provide sensor excitation. Sensor resistance is determined ratiometrically with a half-bridge circuit consisting of the sensor and an internal reference resistor. The current to the sensor can be reversed by the user to test for any offset. Measurement results can be displayed in either kelvins or ohms.

Common Features


Both the SIM922A and SIM923A employ four-wire measurement circuits ($\pm I$ excitation leads, $\pm V$ sense leads), making readings insensitive to series lead resistance. Sensor excitations can be disabled to reduce power dissipation at sensitive cryogenic stages. Measurements are performed at five readings per second.

The scaled analog output (± 10 V) produces a voltage proportional to measured temperature, with a full-scale range from 10 K to 1000 K. A relative-mode button subtracts the last absolute reading prior to scaling to provide expanded resolution for temperature deviations. The second (monitor) output is the buffered, low-noise raw sensor voltage without any additional processing.

Either analog output may be coupled to the SIM960 Analog PID Controller for closed-loop temperature control.

A factory-standard calibration curve is pre-programmed for each model. Non-volatile memory also permits storage of a 256-point custom calibration curve to convert sensor units (V or Ω) to temperature units (K).

Results are displayed on an easy-to-read, 4-digit LED display. Full remote operation is available over the serial interface.

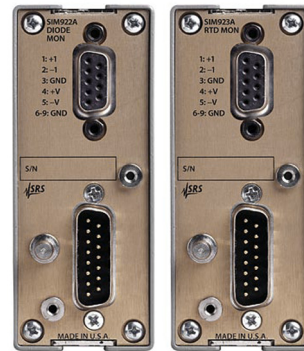

SIM922A & SIM923A rear panels

	SIM922A	SIM923A
Number of inputs	1	1
Sensor type	Si, GaAs or GaAlAs diode	Platinum and other RTDs
Measurement type	4-wire	4-wire
Excitation	10 μ A \pm 0.01 %, \pm 5 ppm/ $^{\circ}$ C	1.0 mA \pm 0.1 %, \pm 5 ppm/ $^{\circ}$ C or 10 μ A \pm 0.1 %, \pm 5 ppm/ $^{\circ}$ C
Sensor units	Volts	Ohms
Input range	0 to 7.5 V	0 Ω to 1400 Ω (1 mA excitation) 0 Ω to 140 k Ω (10 μ A excitation) (includes excitation lead resistance)
Calibration curves	1 std. plus 1 user-defined curve, 256 points	DIN 43760 plus 1 user-defined curve, 256 points
Temperature range	1.4K to 475 K (typ.) (Sensor dependent)	1.4K to 873 K (typ.) (Sensor dependent)
Display resolution	4 digits	4 digits
Interface resolution	1 μ V	1 m Ω / 100 m Ω (1 mA / 10 μ A)
Measurement resolution	4 μ Vrms	1.2 m Ω rms / 120 m Ω rms (1 mA / 10 μ A)
Accuracy, (23 \pm 1) $^{\circ}$ C	20 μ V + 0.01 % of reading	5 m Ω / 0.5 Ω + 0.01 % (1 mA / 10 μ A)
Temperature coefficient	\pm 5 ppm/ $^{\circ}$ C	\pm 5 ppm/ $^{\circ}$ C

Common Specifications

Measurement rate	5 readings per second
Scaled analog output	\pm 10 VDC full-scale range
Full scale	10K, 100K or 1000 K
Resolution	300 μ V
Accuracy	1 mV
Monitor analog output	
Offset	<20 μ V (typ.)
Bandwidth	4 kHz
Operating temperature	0 $^{\circ}$ C to 40 $^{\circ}$ C, non-condensing
Interface	Serial via SIM interface
Connectors	
Sensor	Two DB9 (female)
SIM	DB15 (male) SIM interface
Power (max.)	Powered by SIM900 Mainframe, or by user-provided DC power supply (\pm 15 V and +5 V)
Dimensions	1.5" \times 3.6" \times 7.0" (WHD)
Weight	1.4 lbs.
Warranty	One year parts and labor on defects in materials and workmanship

Ordering Information

SIM922A	Diode temperature monitor
SIM923A	Pt RTD temperature monitor

Small Instrumentation Modules

SIM900 Series — Product overview



SIM900 Series

- SIM mainframe
- Analog PID controller
- AC Resistance bridge
- Bessel/Butterworth filters
- Preamplifiers
- Temperature monitors
- Analog signal conditioning
- Isolated voltage source
- Octal 4-wire multiplexer
- Quad digital voltmeter
- Rubidium frequency standard

SIM — Small Instrumentation Modules — is a compact test and measurement platform for a wide range of applications. Unlike other modular systems, SIM offers complete front-panel as well as remote operation, allowing you to choose between manual and computer control. Up to eight instruments share the same mainframe which provides power, clock synchronization, communications, and module status. For additional versatility, you can cascade mainframes or other RS-232 instruments, and even operate modules outside the mainframe.

With SIM, you configure precision measurement and control systems, achieving the exact functionality you need while avoiding the cost of unnecessary features.

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

rsy@nt-rt.ru || <https://srs.nt-rt.ru/>