

# SIM965

## Технические характеристики

### По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

# Small Instrumentation Modules

SIM965 — Bessel and Butterworth filter

- Bessel and Butterworth filter types
- 1 Hz to 500 kHz
- 3-digit cutoff frequency resolution
- High-pass or low-pass operation
- Selectable rolloff
- Continuous time (not sampled)



## SIM965 Analog Filter

The SIM965 Analog Filter is ideal for signal conditioning applications where Bessel or Butterworth filters are needed. Bessel filters offer clean step response (negligible overshoot) and linear phase response, while Butterworth filters provide excellent pass-band flatness with some overshoot. A choice of high-pass or low-pass filtering is selected from the front panel. Cutoff frequencies are set with 3-digit resolution, and a choice of 12, 24, 36 or 48 dB/octave rolloff is provided for either filter type.

The SIM965 accepts input signals between  $\pm 5$  V, and has unity gain. Its low noise and low harmonic distortion, along with a bandwidth of greater than 1 MHz, make it ideal in sensitive analog applications. If signal amplification is needed, the SIM910 JFET Preamplifier, or the SIM911 BJT Preamplifier should be considered.

Up to eight SIM965 modules can be housed in one SIM900 mainframe. Mainframes can be cascaded, allowing an unlimited number of filter channels for complex applications.

The SIM965 is also fully programmable. All functions can be controlled from a computer via the SIM900 Mainframe. Both RS-232 and GPIB interfaces are supported by the mainframe.

The digital control circuitry in the SIM965 is designed with a special clock-stopping architecture in which the microcontroller is turned on only when settings are being changed. This guarantees that no digital noise can contaminate low-level analog signals.

## Ordering Information

SIM965 Programmable analog filter

**Input**

Impedance	1 M $\Omega$
Coupling	AC or DC
Gain	1 $\times$
Max. input	$\pm 5$ V (48 dB/Oct Butterworth setting) $\pm 7$ V (36 dB/Oct Butterworth setting) $\pm 10$ V (all other Butterworth settings and all of the Bessel settings)

**Filter**

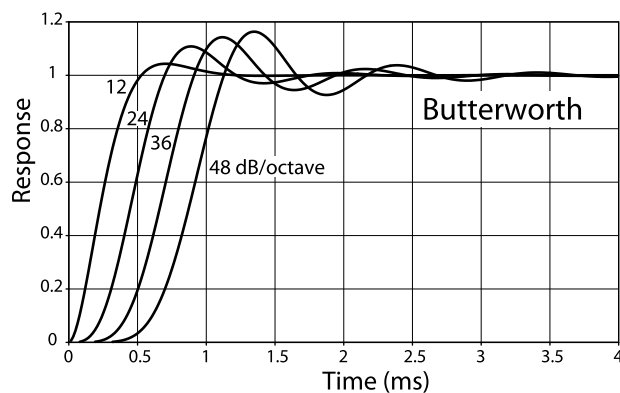
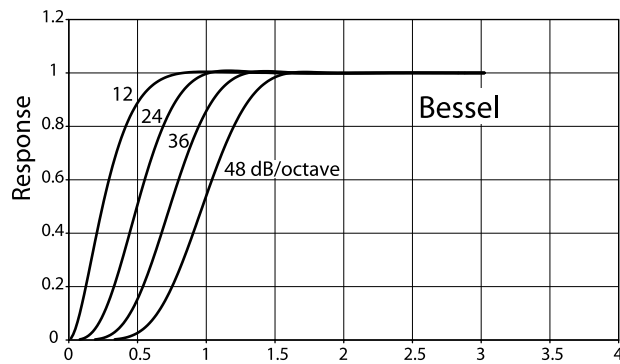
Filter	Low-pass or high-pass
Tuneable freq. range	1 Hz to 500 kHz
Resolution	3-digit
Type	Butterworth, Bessel
Rolloff	12 dB/oct., 24 dB/oct., 36 dB/oct., or 48 dB/oct.

**Output**

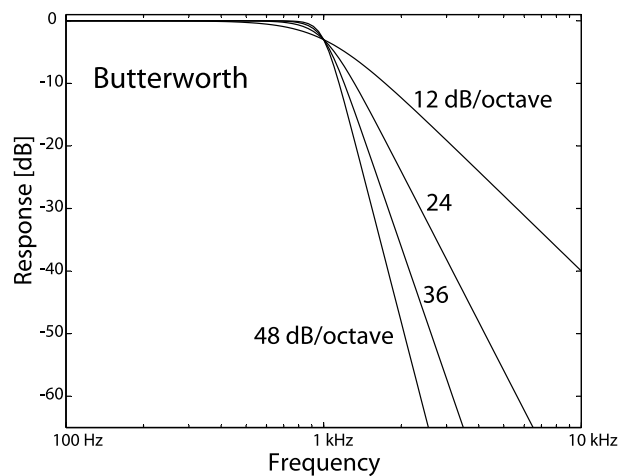
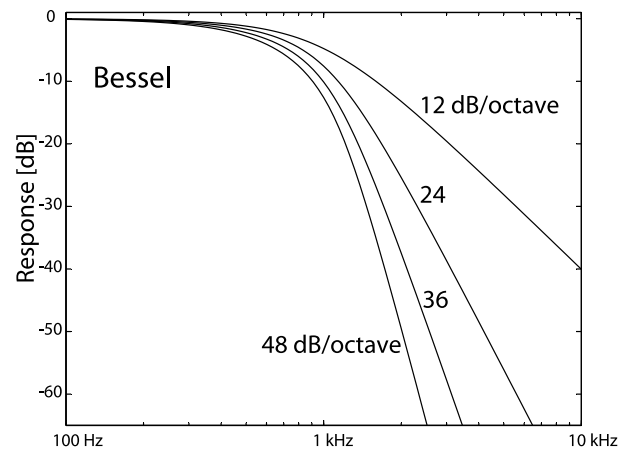
Noise	<200 $\mu$ Vrms (1 MHz bandwidth)
THD	0.01 % (80 dB) at 1 kHz

**General**

Operating temperature	0 $^{\circ}$ C to 40 $^{\circ}$ C, non-condensing
Interface	Serial via SIM interface
Connectors	BNC (2 front, 1 rear) DB15 (male) SIM interface
Power	Powered by SIM900 Mainframe, or by user-provided DC power supply ( $\pm 15$ V and +5 V)
Dimensions	1.5" $\times$ 3.6" $\times$ 7.0" (WHD)
Weight	1.5 lbs.
Warranty	One year parts and labor on defects in materials and workmanship

**Step Response**

Note: All graphs correspond to a 1 kHz cutoff frequency

**Frequency Response**

# Small Instrumentation Modules

SIM900 Series — Product overview



## SIM900 Series

- SIM mainframe
- Analog PID controller
- AC Resistance bridge
- Bessel/Butterworth filters
- Preamplifiers
- Temperature monitors
- Analog signal conditioning
- Isolated voltage source
- Octal 4-wire multiplexer
- Quad digital voltmeter
- Rubidium frequency standard

SIM — Small Instrumentation Modules — is a compact test and measurement platform for a wide range of applications. Unlike other modular systems, SIM offers complete front-panel as well as remote operation, allowing you to choose between manual and computer control. Up to eight instruments share the same mainframe which provides power, clock synchronization, communications, and module status. For additional versatility, you can cascade mainframes or other RS-232 instruments, and even operate modules outside the mainframe.

With SIM, you configure precision measurement and control systems, achieving the exact functionality you need while avoiding the cost of unnecessary features.

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

rsy@nt-rt.ru || <https://srs.nt-rt.ru/>