

SR554

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

Lock-In Preamplifier

SR554 — Transformer preamplifier with differential input



SR554 Transformer Preamplifier

- Transformer-coupled input
- 0.1 nV/ $\sqrt{\text{Hz}}$ input noise
- 0.1 Hz to 40 kHz bandwidth
- Gain of 100 or 500
- Single-ended and differential inputs
- >40 dB isolation from DC to 500 MHz
- Powered by SRS lock-in amplifiers


The SR554 is a low-noise, transformer-coupled preamplifier optimized for source impedances between 0.05 Ω and 1 k Ω . With an input noise of only 0.1 nV/ $\sqrt{\text{Hz}}$, the SR554 can be used in a wide range of low-noise applications. It is the ideal preamplifier for low-temperature, synchronous detection applications where isolation between the experimental sample and the lock-in amplifier is critical.

The SR554 can operate in one of two modes. In the “bypassed” mode, the instrument is simply a passive transformer with a turns ratio of 100, providing an overall voltage gain of 100. In the “non-bypassed” mode, an additional amplifier (gain of 5) is added, increasing the overall gain to 500 and providing a low-impedance (<1 Ω) output. In the bypassed mode, the SR554 requires no external power. When using the output amplifier, ± 20 VDC must be supplied. The preamplifier connector on SRS lock-ins can be used to power the SR554.

Specifications



Mode	Single-ended or differential
Noise	0.1 nV/ $\sqrt{\text{Hz}}$
Source impedance	0.05 Ω to 1 k Ω (recommended)
CMRR	>120 dB below 1 kHz
Common mode range	Primary can float to ± 100 VDC
Gain	100 \times (transformer only) 500 \times (transformer and buffer)
Max. freq. response	0.1 Hz to 40 kHz
Isolation	>40 dB, DC to 500 MHz
Output	Single-ended or differential
Maximum output	100 Vpp (transformer only) 20 Vpp (transformer and buffer)
Output impedance	>5 k Ω (transformer only) <1 Ω (transformer and buffer)
Power	Supplied by SR510, SR530, SR810, SR830, SR850 or SR124 via control cable. External ± 20 VDC supplies can also power the SR554.
Dimensions	3.75" \times 3" \times 7.5" (WHD)
Weight	4 lbs.
Warranty	One year parts and labor on defects in materials and workmanship

SR554 Noise Figure Contours

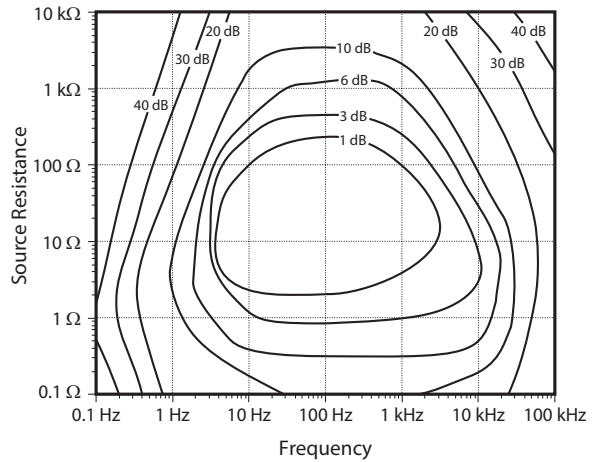

Ordering Information

SR554 Transformer preamplifier

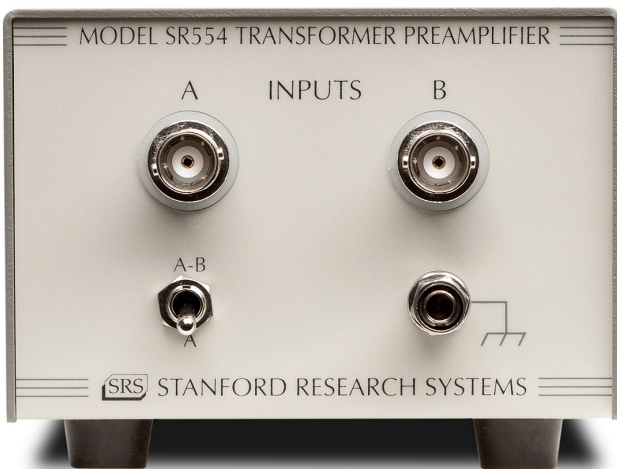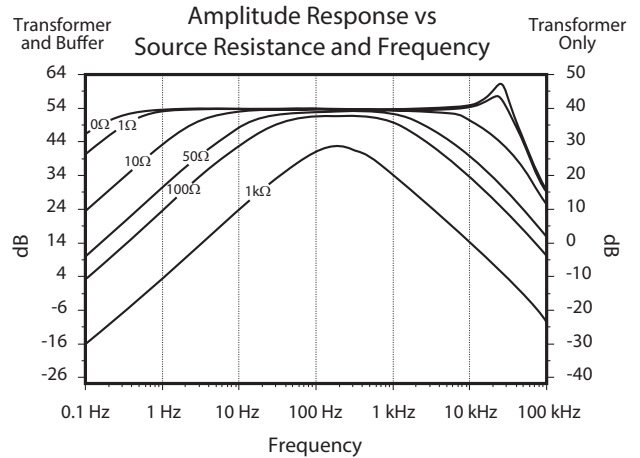

SR554 Front Panel

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

rsy@nt-rt.ru || <https://srs.nt-rt.ru/>